


# ROHS-COMPLIANT


| LTR | REV. | DESCRIPTION | DATE |
|-----|------|-------------|------|
|     |      |             |      |

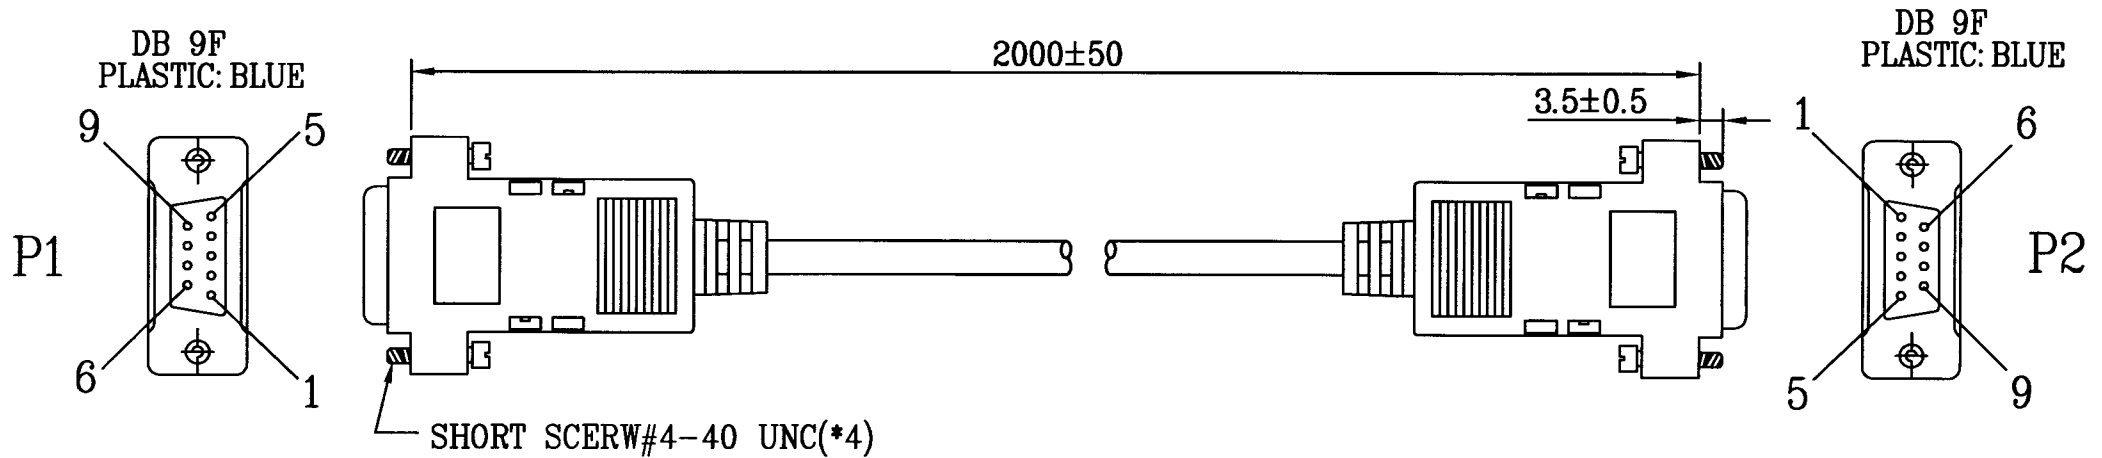

**NOTE:**

1. CABLE: NON-UL 28AWG(7/0.127 T.C)\*9C+DRAIN WIRE(7/0.127 T.C)+AL/MY PVC JACKET,COLOR: BEIGE(NK-A03).OD:  $\phi 5.0 \pm 0.15$ mm
2. CONNECTOR:  
P1&P2: DB9P FEMALE GOLD FLASH CONTACT  
NICKEL PLATED SHELL .
3. HOOD: ASS'Y TYPE , COLOR: BEIGE(NK-A03).
4. ELECTRICAL TEST:  
100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE  $3\Omega$  MAX .  
INSULATION RESISTANCE  $5M\Omega$  MIN .
5. PACKING: SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)  
EAN CODE: 4016032062967.

**NEOSTAR**  
**For Reference**  
**Date:**

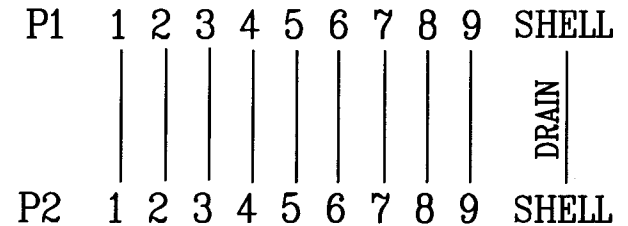

| Tolerance Inch M/M         |      |     | <b>NEOSTAR</b> TECHNOLOGY CO., LTD.          |  |
|----------------------------|------|-----|--|--|
| .X                         | .015 | .30 |  |  |
| .XX                        | .010 | .10 |  |  |
| .XXX                       | .005 | .05 |  |  |
| Draw<br>FANNIE 10/11/07    |      |     | Customer P/N: AK 231 2M                      |  |
| Chk<br><i>[Signature]</i>  |      |     | App'd<br><i>[Signature]</i> Customer E-SSM   |  |
| Engr<br><i>[Signature]</i> |      |     | Scale NONE Units Sm/m Third Angle Projection |  |
| Dwg No. 120-2894           |      |     | REF: I Sheet 1/1                             |  |