

1

2

3

4

5

6

7




Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

IEEE 1394 6M
PLASTIC:BLACK

3000 ± 30mm


IEEE 1394 6M
PLASTIC:BLACK

P1

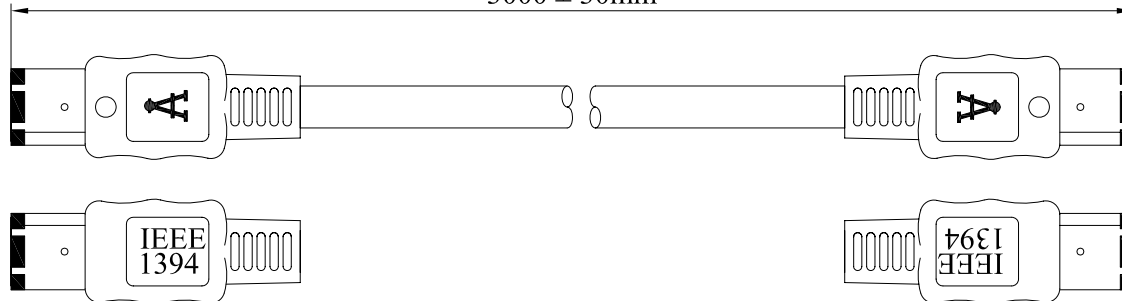

NOTE:

- CABLE: [28 AWG(7/0.127)T.C*1PAIR+AL/MYLAR+BRAID SHIELD(16/5/0.1)T.C]*2
+22AWG (7/0.254)T.C*2C+DRAIN WIRE(7/0.1)+MYLAR*2+AL/MYLAR+BRAID(24/8/0.1)90%
+PVC JACKET COLOR:MATT BLACK, OD:6.0±0.3mm
UL20276 APPROVED IEEE 1394 CABLE
- CONNECTOR:
P1&P2 : IEEE1394 6 PIN MALE CONTAC:GOLD PLATED 15u"; NICKEL PLATED SHELL
- HOOD : MOLDED TYPE,PVC 45P,COLOR:MATT BLACK.
- TEST REQUESTED:
<1>.100% OPEN SHORT MIS WIRE TEST
<2>.CONTACT RESISTANCE 3Ω MAX
<3>.INSULATION RESISTANCE 20MΩMIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE :DB VP3
(HANKING SIZE MUST BE SMALLER THAN PACKING)

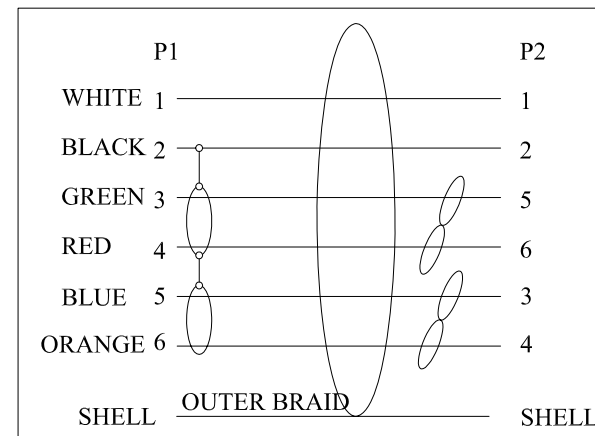

RoHS Compliant

EAN Code:
4016032051749

ST81407

Date		Name		Part No.	
Drawn by	Dec.20,2005	Norman Xu	<h1>AK-1394-30</h1>		
Checked by	Dec.20,2005	Alex Dan			
Approved by					
<h1>ASSMANN</h1> Electronic GmbH				Title:	
				1394 A 6PIN MALE TO 1394 A 6PIN MALE CABLE, 3.0M	
				Scale	N/A
Unit	MM				

1

2

3

4

5

6

7