


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

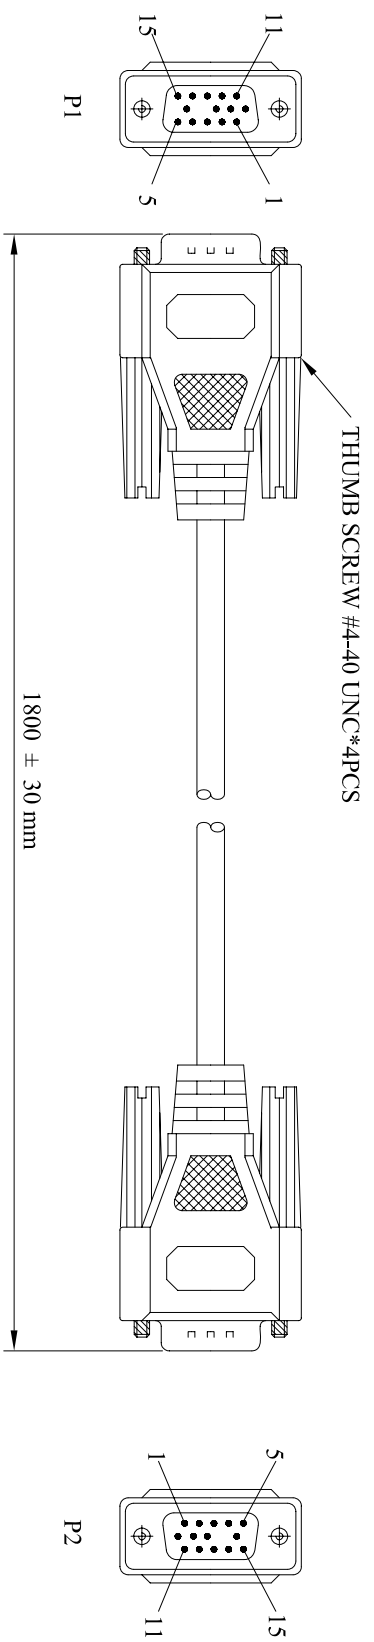

PIN OUT	
P1	1 2 3 4 5 6 7 8 10 11 12 13 14 15 SHELL
P2	1 2 3 4 5 6 7 8 10 11 12 13 14 15 SHELL
	DRAIN

NOTE:

1. CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR PVC JACKET COLOR:BEIGE, OD:6.0± 0.2mm
2. CONNECTOR:
P1&P2:HD15P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)
3. HOOD:MOULDED TYPE PVC 45P COLOR:BEIGE.
4. ELECTRICAL TEST:
<1>>100% OPEN SHORT & MIS WIRE TEST.
<2>>CONTACT RESISTANCE 3 Ohms MAX.
<3>>INSULATION RESISTANCE 20M Ohms MIN.
5. PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE
PACKING TYPE: DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN CODE:
4016032064022

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 532
Title	VGA Monitor Connection Cable

Scale	N/A	Sheet	1/1
Unit	MM		

ASSMANN
Electronic GmbH

1	2	3	4	5	6	7
1	2	3	4	5	6	7