

1

2

3

4




5

6



7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk production	Dec.20,2005	01

DVI_A(M)
PLASTIC:BLACK

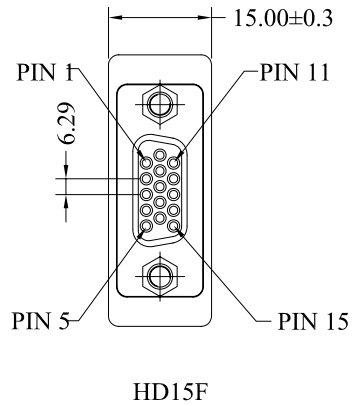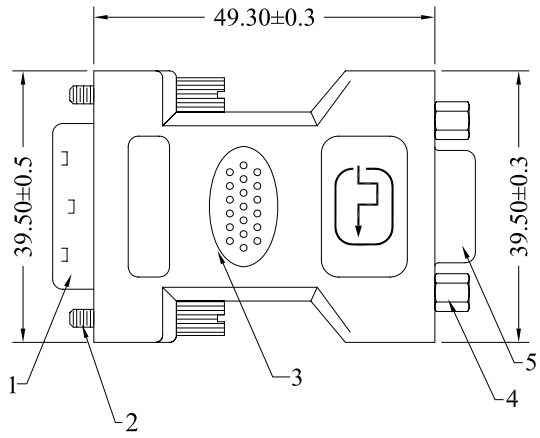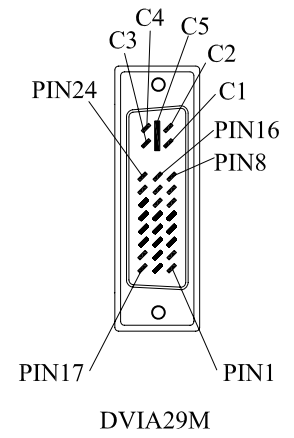

PIN OUT	
DVIA 29PIN (M)	HD 15PIN (F)
C1	1
C2	2
C3	3
C4	13
C5	6
	7
	8
6	15
7	12
8	14
14	9
16	
15	5
SHIELD	10
	SHIELD

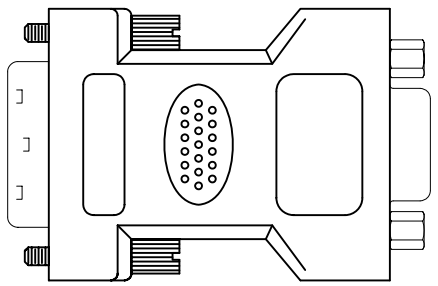

NOTES:

- DVI-Analog 29P Male Connector, Insulator: High Temperature Plastic UL-94V-0 Contact: Brass Shell: Steel With Tin Plated 150U" Over, Contact Plating: G/F Selective Plating And Tin/LEAD On Solder Cup All With Nickel Underplating
- Jack Screw : UNC #4-40 Nickel Plated.
- Hood: P.V.C Molded Color: Black, Inner Molded With Copper Foil Shielded
- Screw Lock: UNC #4-40 Nickel Plated.
- D-SUB High Density 2.29mm 15P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated.
 - 100% OPEN / SHORT / INSULATING TEST
 - INSULATION TEST: 5M OHMS.
 - PACKING: SEE DWG P-0039 REV.C PACKING DRAWING.
 - EAN-CODE: 4016032083672

RoHS Compliant

Date		Name		Part No.	
Dec.20,2005		Norman Xu		AB 543	
Checked by		Alex Dan			
Approved by					
ASSMANN Electronic GmbH				Title.	
				DVI_A/M - VGA/F ADAPTOR	
Scale		N/A		Sheet	
Unit		MM		1/1	

ST81407

1

2

3

4

5

6

7