


LTR	REV.	DESCRIPTION	DATE

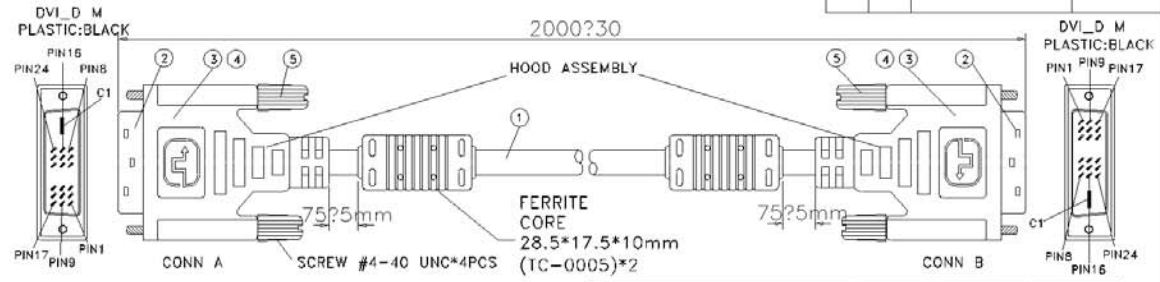

CONN A	CONN B	COLOR	NOTE
1	1	WHITE	(TMDS DATA 2-)
2	2	RED	(TMDS DATA 2+)
3	3	SHIELD	(TMDS DATA 2 SHIELD)
6	6	PURPLE	(DDC CLOCK)
7	7	RED	(DDC DATA)
9	9	WHITE	(TMDS DATA 1-)
10	10	GREEN	(TMDS DATA 1+)
11	11	SHIELD	(TMDS DATA 1 SHIELD)
14	14	YELLOW	(POWER +5V)
15	15	ORANGE	(GROUND +5V&HV SYNC)
16	16	WHITE	(HOT PLUG DETECT)
17	17	WHITE	(TMDS DATA 0-)
18	18	BLUE	(TMDS DATA 0+)
19	19	SHIELD	(TMDS DATA 0 SHIELD)
22	22	SHIELD	(TMDS CLOCK SHIELD)
23	23	BROWN	(TMDS CLOCK+)
24	24	WHITE	(TMDS CLOCK-)
SHELL	SHELL		GROUND

DESCRIPTION	LENGTH	CABLE COLOR	HOOD COLOR
DVI-D-DVLD SINGLE LINK CABLE	2000±30	BLACK	BLACK

NO	NAME	DESCRIPTION	QTY
5	SCREW	SCREW(BLACK) #4-40 UNC	4
4	CAN	DVI METAL CAN	2
3	HOOD	ASS'Y TYPE COLOR:BLACK	2
2	CONN	DVI 18 + 1 DIGITAL CONN MALE	2
1	CABLE	DVI DIGITAL SINGLE LINK CABLE OD:7.30mm BLACK UL20276 (28AWG*1PAIR+DW+AL/MT)*4+28AWG*1PAIR+28AWG*5C+AL+85%BRN	

PACKING:SEE P-0039 REV.C PACKING DRAWING
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)
 EAN CODE:4016032083207
 BLISTER SIZE:DB VP4

Tolerance	Inch	M/M
.x	.015	.30
.xx	.010	.30
.xxx	.005	.05

Drawn: TENDWARD 04/13
 Check: [Signature]
 Engr: [Signature]

NEOSTAR TECHNOLOGY CO., LTD.
 Title: DVI-D-DVLD SINGLE LINK CABLE
 Customer P/N: AK 620
 Customer: E-SSM
 Scale: NONE Units: n/m Inra Angle Projection
 Dwg No. 200-0088 REF: III Sheet 1/1

- TEST REQUEST:
- 100% OPEN SHORT & MIS WIRE
 - CONTACT RESISTANCE 3 OHM MAX
 - INSULATION RESISTANCE 20M OHM MIN
 - HI-POT VOLTAGE 300V DC