


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

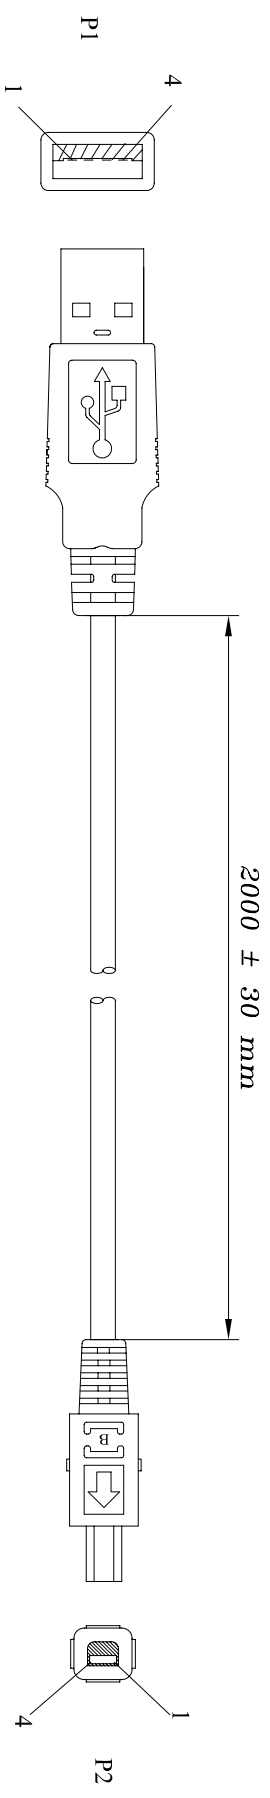

NOTES:

1. CABLE: UL-2725 28AWG*2C+28AWG*1PR+AL-FOIL/MYLAR +SPIRAL PVC JACKET (90P) OD:3.5± 0.15mm COLOR:BLACK.
- 2.CONNECTORS:
 P1: USB A TYPE MALE GOLD FLASH CONTACT NICKEL PLATED SHELL.
 P2: (MITSUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)
- 3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK.
- 4.TEST REQUEST:
 <1>.100% OPEN SHORT & MIS WIRE TEST.
 <2>.CONTACT RESISTANCE 3Ω MAX.
 <3>.INSULATION RESISTANCE 20MΩ MIN.
 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
 PACKING TYPE: DB VP3
 (HANKING SIZE MUST BE SMALLER THAN PACKING)

P1		P2	
RED	1	RED	1
WHITE	2	WHITE	2
GREEN	3	GREEN	3
BLACK	4	BLACK	4
SHELL		SHELL	

1	2	3	4	5	6	7
<p>1. CABLE: UL-2725 28AWG*2C+28AWG*1PR+AL-FOIL/MYLAR +SPIRAL PVC JACKET (90P) OD:3.5± 0.15mm COLOR:BLACK.</p> <p>2.CONNECTORS: P1: USB A TYPE MALE GOLD FLASH CONTACT NICKEL PLATED SHELL. P2: (MITSUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)</p> <p>3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK.</p> <p>4.TEST REQUEST: <1>.100% OPEN SHORT & MIS WIRE TEST. <2>.CONTACT RESISTANCE 3Ω MAX. <3>.INSULATION RESISTANCE 20MΩ MIN. 5.PACKING:SEE P-0039 REV.C PACKING DRAWING PACKING TYPE: DB VP3 (HANKING SIZE MUST BE SMALLER THAN PACKING)</p>						
<p>Part No. AK 670M</p> <p>Title: Mini USB Cable</p> <p>Scale: N/A</p> <p>Unit: MM</p> <p>Sheet: 1/1</p>						
<p>RoHS Compliant</p> <p>EAN Code: 4016032083030</p>						

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

ASSMANN
Electronic GmbH

STR1407