


	1	2	3	4	5	6	7	
						Signature	Revision History	Date Rev.
						Norman Xu	For Bulk Production	Dec.20,2005 01

A								
	2000± 30mm							

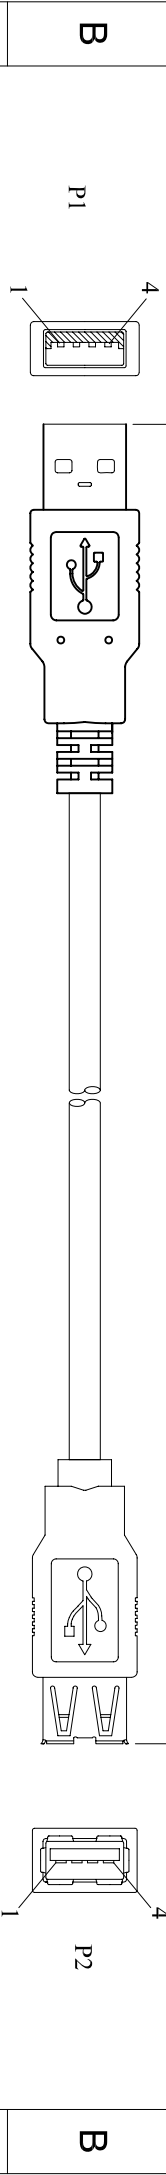

B								
C								
D	NOTES: 1.CABLE: UL-2725 30AWG(7/0.102 B.C)*2C INS:SR-PVC ID: 0.8± 0.05 +30AWG(7/0.102 B.C)*2C INS: SR-PVC ID: 0.6± 0.05+AL-FOIL/MYLAR +DRAIN WIRE 32AWG(1/0.203 B.C)+BRAID(8/2/0.1 T.C) PVC JACKET OD: 4.0± 0.15mm COLOR: BLACK, REV 2.0 2.CONNECTER: P1: USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL P2: USB A TYPE FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL 3.HOOD: MOLDED TYPE, PVC 45F, COLOR: BLACK. 4.ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST. <2>CONTACT RESISTANCE 3 Ohms MAX. <3>INSULATION RESISTANCE 20M Ohms MIN. 5.PACKING: SEE P-0039 REV.C PACKING DRAWING PACKING TYPE: DB VP3 (HANKING SIZE MUST BE SMALLER THAN PACKING)							
E								
F								
G								
H								

P1	P2
RED 1	1 VCC
WHITE 2	2 -DATA
GREEN 3	3 +DATA
BLACK 4	4 GROUND
SHELL	BRAID
	SHELL

	Date	Name	Part No.
Drawn by	Dec.20,2005	Norman Xu	AK 7011/2/AL
Checked by	Dec.20,2005	Alex Dan	
Approved by			

ASSMANN			
Electronic GmbH			
Standard USB 2.0 Extension Cable		Scale	Sheet
		Unit	1/1

EAN Code:
4016032183594

RoHS Compliant

1	2	3	4	5	6	7	
---	---	---	---	---	---	---	--