



**TECHNICAL DATA SHEET**  
**CABLE CONSTRUCTION**  
**AI-DQ(ZN)BH 4G 50/125 $\mu$  OM3**  
**4 CORES MULTI MODE (50/125-OM3)**  
**INDOOR/OUTDOOR TYPE**  
**FIBER OPTIC CABLES**

**TECHNICAL DATA SHEET**  
**SECTION 1**  
**CABLE CONSTRUCTION**


Characteristics		Offered by the Tenders
1.No of tubes		1 (One Tube)
2.No of Fibers per Cable		4 Fibers
3.Loose tube -Material - Diameter  -Type of filling compound		- Polybuteneterepheteleta (PBT) - 3,5 mm  - Thyrotrophic jelly
4. Tensile strength member -Material		- Glass yarn
5.Outer Sheath -Material and Thickness		- LSOH-UV - 1,5 mm thickness
6.Identification		<b><i>DIGITUS DK-35041-3U AI-DQ(ZN)BH 4 FO MM 50/125-OM3 RoHS 80291 E90-01 MM/YY "XXXX" M</i></b>
7.Drum Length		2000 meters ( $\pm 10\%$ )
8. Cable weight (kg/km) approx.		80 kg / Km
9. Outer Diameter of cable approx.		7 mm
10.Test results of Mechanical characteristics		
-Tensile strength	IEC – 974-1-E1	-900 / 1200 N
- Bending radius	IEC – 974-1-E11	- 15 X O. Diameter of cable (Static) - 20 X O. Diameter of cable (dynamic)
- Storage & Operating Temperature	IEC – 974-1-F1	- -40 degree to +70 degree
- Impact Resistance	IEC – 974-1-E4	-20nm
- Crush Resistance	IEC – 974-1-E3	- 1500 N
Repeated Bending	IEC – 974-1-E6	- 10xD / 50N Load ( 10 Bending )



TECHNICAL DATA SHEET  
SECTION 2  
Attenuation for cable

Ref (nm)	Max.
850	3,2 dB/km
1300	1,0 dB/km

TECHNICAL DATA SHEET  
SECTION 3  
TECHNICAL DRAWING

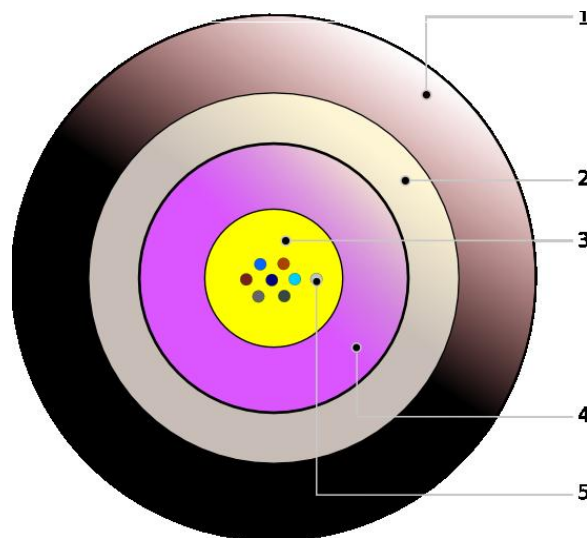

- 1 Outer Sheath (LSOH-UV Jacket)
- 2 Glass Yarn
- 3 Filling Material
- 4 Central Tube
- 5 4 Fibers per Cable

TECHNICAL DATA SHEET  
SECTION 4  
OPTICAL FIBER CORE SPECIFICATIONS

Draka-Comteq **“MaxCap 300 – 10Gb/s GIMM”** MULTI MODE FIBER