


## **Printserver 3 Port with 2 USB and 1 parallel Port DN-13006-V**



### **Features**

- Equipped with 1 parallel port and 2 USB ports allows user to share three printers on LAN simultaneously
- Compliant with USB 1.1
- Equipped one 10/100TX Ethernet/Fast Ethernet LAN port
- Multi protocol support is ideal for shared printing in mixed-LAN environments
- Bi-directional communication allows collection of information for attached printer's status
- Windows-based administrative program makes it possible to set up in a few minutes.
- Latest MIB-II (RFC 1213) for SNMP standard management
- Offer LPR program for Windows 95/98/Me TCP/IP printing
- IP assignment support for DHCP, BOOTP and RARP
- Support Web configuration
- Provide Flash memory for easy firmware upgrade
- Support IPP for Windows 2000/XP
- Support UPnP(Universal Plug and Play) for Windows XP/2003
- Support Mac 10.2 "Rendezvous" zero-configuration function

## **Block diagram for DN-13006-V**

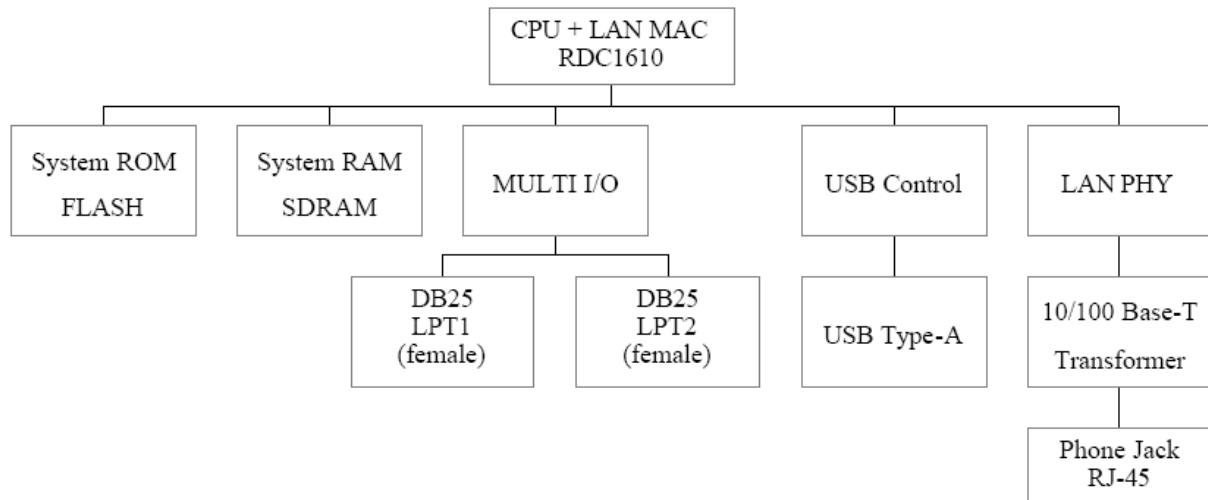

## **System Specification**

### **System Hardware :**

|                            |                                   |
|----------------------------|-----------------------------------|
| SDRAM:                     | 8M Byte                           |
| Flash ROM:                 | 2M Byte                           |
| Power Supply:              | 5V switching type power adapter   |
| Maximum power consumption: | 2.7 Watt (5V*540mA)               |
| LED Indicator:             | Power, Link/Act, USB1, USB2, LPT1 |

### **System Software :**

- Real-time OS
- Transport Protocols : TCP/IP, NetBEUI, AppleTalk
- TCP/IP Protocols Supported : BOOTP, SNMP, Telnet, TFTP, FTP, LPD, DHCP, IPP

### **Support O.S. :**

- Windows 95/98/Me, Windows NT, Windows 2000/XP
- NetWare 5.x NDPS LPR Remote Printing (TCP/IP)
- HP-UX Unix, Sun O.S, Solaris, SCO Unix, AIX,
- Unixware, Linux
- Mac O.S. Appletalk

### **Management Utility : Ps Admin**

Support OS : Windows 95/98/98 SE, Windows 2000/Me/XP, Windows NT3.51 or later.

**Art. No.:** DN-13006-V

**EAN:** 192404

/

**4016032192404**