


MATERIALS:
SHIELDED: STAINLESS STEEL.
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMBILITY RATING UL 94V-0.
CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

6u" P/N 3101815601
15u" P/N 3101815701
30u" P/N 3101815801
50u" P/N 3101815901

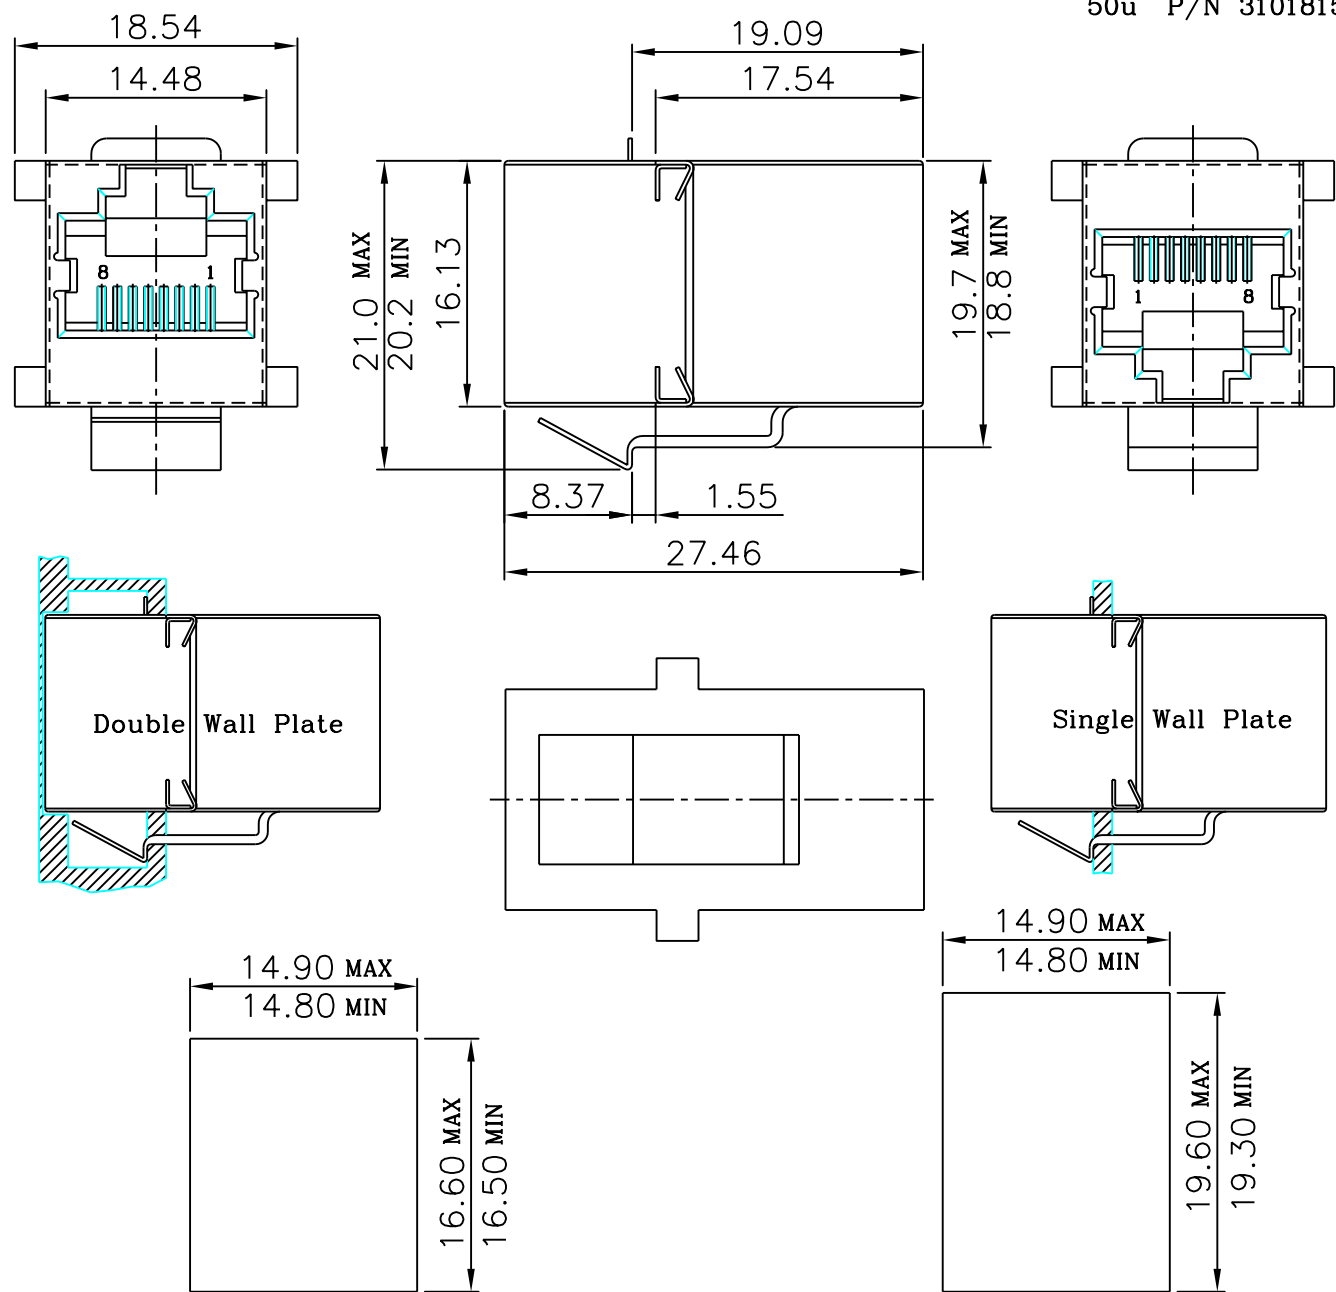

Front Panel Jack Only Clearance
W/O Latch Feature

Single Panel-Latch Clearance
Panel Thickness 0.062 inch

修正	REVISION	日期	DATE	容許公差	TOLERANCE	品名	MODULAR COUPLER JACK
				.XXX	±0.10	ARTICLE	(8P8C SHIELDED)
				.XX	±0.25	圖號	3101815601
				.X	±0.38	DWG NO.	
				X	±0.50	單位 UNIT	mm
				核准	APPD.	比例 SCALE	2/1
				校對	CHKD.	張數 SHEET	1/1
				設計	DR. Hsu	版本 REV.	A
				88-01-04			