


LTR	REV.	DESCRIPTION	DATE
△	B	ECN # 020510-5 CHANGE PACKING	05/10/02

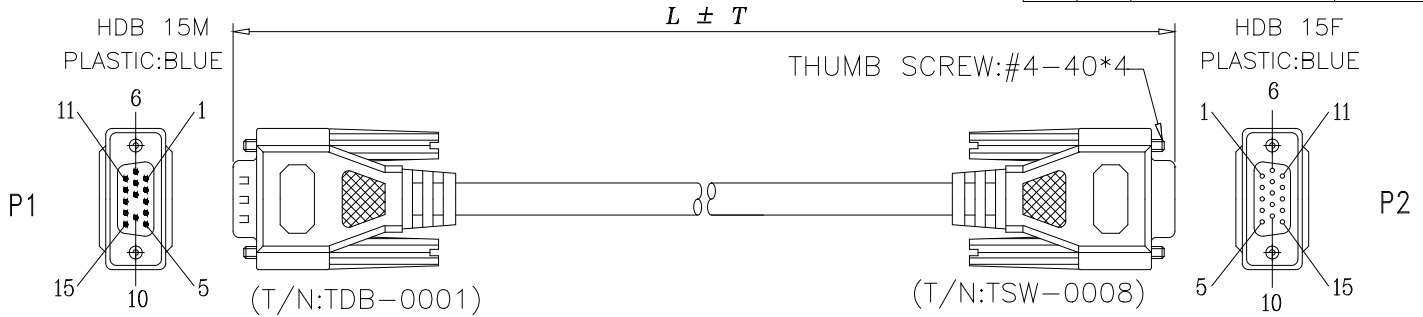

NOTE:

1.CABLE:28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER  
 JACKET:PVC ØD: 2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*4C  
 INSULATION:SR-PV Ø ID: 0.85±0.05mm(UL-1061)+AL/MY+DRAIN  
 WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
 COLOR:BEIGE(NK-A03) OD: 8.1±0.15mm UL-2919

2.CONNECTOR:

P1:HDB 15P MALE,GOLD FLASH CONTACT PLATED SHELL  
 (9TH PIN UNLOAD)

P2:HDB 15P FEMALE,GOLD FLASH CONTACT PLATED SHELL

3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE  
 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE(NK-A03)

5.ELECTRICAL TEST:


<1>.100% OPEN SHORT & MIS WIRE TEST

<2>.CONTACT RESISTANCE 3 MAX

<3>.INSULATION RESISTANCE 20M MIN

△ 6.PACKING:SEE P-0039 REV.C PACKING DRAWING  
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN OUT

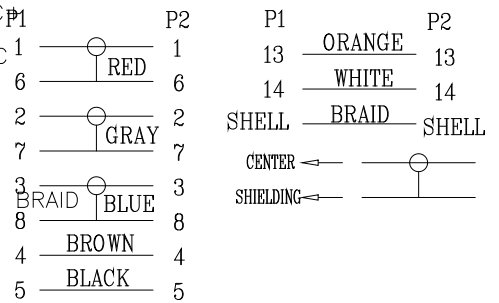

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

**NEOSTAR** TECHNOLOGY CO., LTD.

DWG NO	EAN CODE	P/N	LENGTH	PACKING	BLISTER
120-1076401	6032063148	3220	1800±30mm	<1>	DB VP4
120-1076402	6032063490	3730	3000±30mm	<1>	DB VP4
120-1076403	6032063520	3740	3000±50mm	<2>	DB VP5
120-1076404	6032063550	3750	10000±50mm	<2>	DB VP5

Title		PREMIUM VGA MONITOR EXTENSION	
Customer P/N			
App'd	Customer E-SSM		
Scale	NONE	Units	m/m
Dwg No. 120-1076		REV: B	Sheet 1/1