


LTR	REV.	DESCRIPTION	DATE

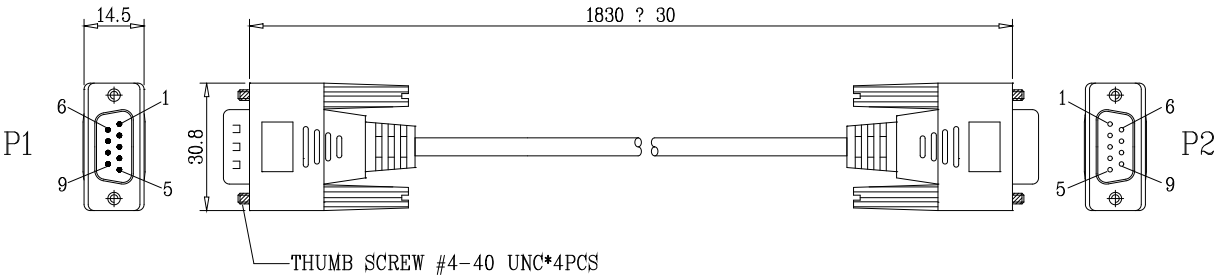

NOTE:

- 1.CABLE: NON-UL 28AWG(7/0.127)TC*9C+DRAIN WIRE+AL-FOIL/MYLAR
PVC JACKET OD: $\phi 5.0 \pm 0.2\text{mm}$ COLOR: BLACK(NK-K01)
- 2.CONNECTOR:
P1: DB9P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
PLASTIC COLOR: BLUE(PANTONE 661C)
P2: DB9P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
PLASTIC COLOR: BLUE(PANTONE 661C)
- 3.HOOD: MOLDED TYPE, PVC 45P, COLOR: BLUE(PANTONE 661C)
- 4.ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST .
<2>CONTACT RESISTANSE 3 Ohms MAX .
<3>INSULATION RESISTANSE 20M Ohms MIN .
- 5.PACKING: EACH PC / POLYBAG

P1	1	2	3	4	5	6	7	8	9	SHELL
P2	1	2	3	4	5	6	7	8	9	SHELL

Tolerance Inch M/M			Assmann Electronic GmbH
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
Draw KIKI 09/20			Title DB9/M - DB9/F CABLE
Chek			Customer P/N KC 10
Engr			App'd Customer E-SSM
			Scale NONE Units m/m Third Angle Projection
			Dwg No.120-1681 REF: I Sheet 1/1

