



Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

2000 ± 30mm

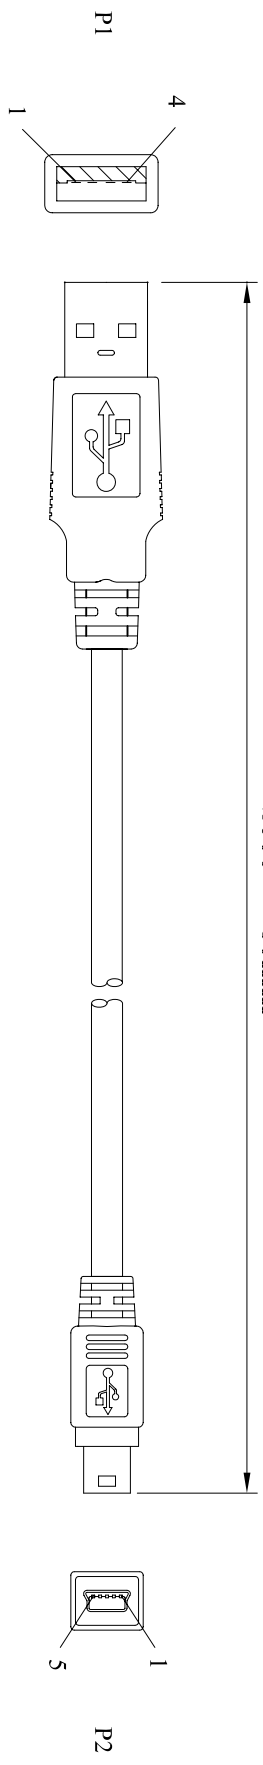

NOTES:

1. CABLE:JUL-2725 80° C 30V [28AWG(7/0.127)\*1PAIR INS:FO-PE ID:Ø0.85±0.05mm  
+26AWG(7/0.163)\*2C INS:SR-PVC ID:0.9±0.05mm  
+AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65%)]TIN  
PVC JACKET OD:4.7±0.15mm COLOR:GRAY.
- 2.CONNECTOR:  
P1: USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.  
P2: MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.HOOD: MOLDED TYPE, PVC 45P, COLOR:GRAY.
- 4.ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MIS WIRE TEST .  
<2>.CONTACT RESISTANCE 3 OHM MAX.  
<3>.INSULATION RESISTANCE 20M OHM MIN.

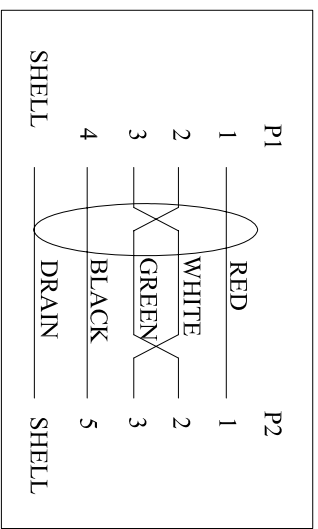

- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP3  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN Code:  
4016032122432

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 672M-2
Title:	Mini USB Cable

**ASSMANN**  
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H