


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

3000 ± 30mm

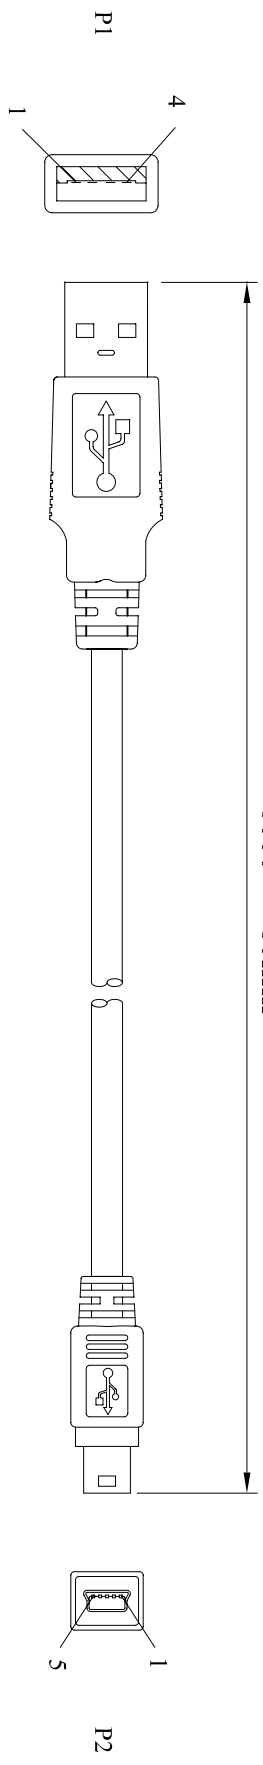

NOTES:

1. CABLE:JUL-2725 80° C 30V [28AWG(7/0.127)\*1PAIR INS:FO-PE ID:Ø0.85± 0.05mm

+26AWG(7/0.163)\*2C INS:SR-PVC ID:0.9± 0.05mm

+AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65%)TTIN

PVC JACKET OD:4.7± 0.15mm COLOR:GRAY.

2.CONNECTOR:

P1: USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

P2: MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

3.HOOD: MOLEDED TYPE, PVC 45P, COLOR:GRAY.

4.ELECTRICAL TEST:

<1>.100% OPEN SHORT & MIS WIRE TEST .


<2>.CONTACT RESISTANCE 3 OHM MAX.

<3>.INSULATION RESISTANCE 20M OHM MIN.

5.PACKING:SEE P-0039 REV.C PACKING DRAWING

PACKING TYPE: DB VP3

(HANKING SIZE MUST BE SMALLER THAN PACKING)

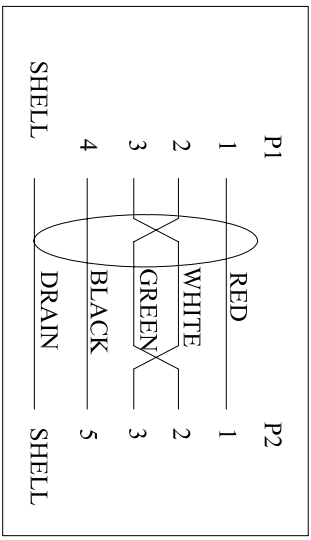

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 672M-3
Title:	Mini USB Cable

RoHS Compliant

EAN Code:  
4016032122449

STR1407

A	1	2	3	4	5	6	7	
B	1	2	3	4	5	6	7	
C								
D								
E								
F								
G								
H								