


| | | | |
|-----------|---------------------|-------------|------|
| Signature | Revision History | Date | Rev. |
| Alex.Dan | For Bulk Production | Dec.20,2005 | 01 |

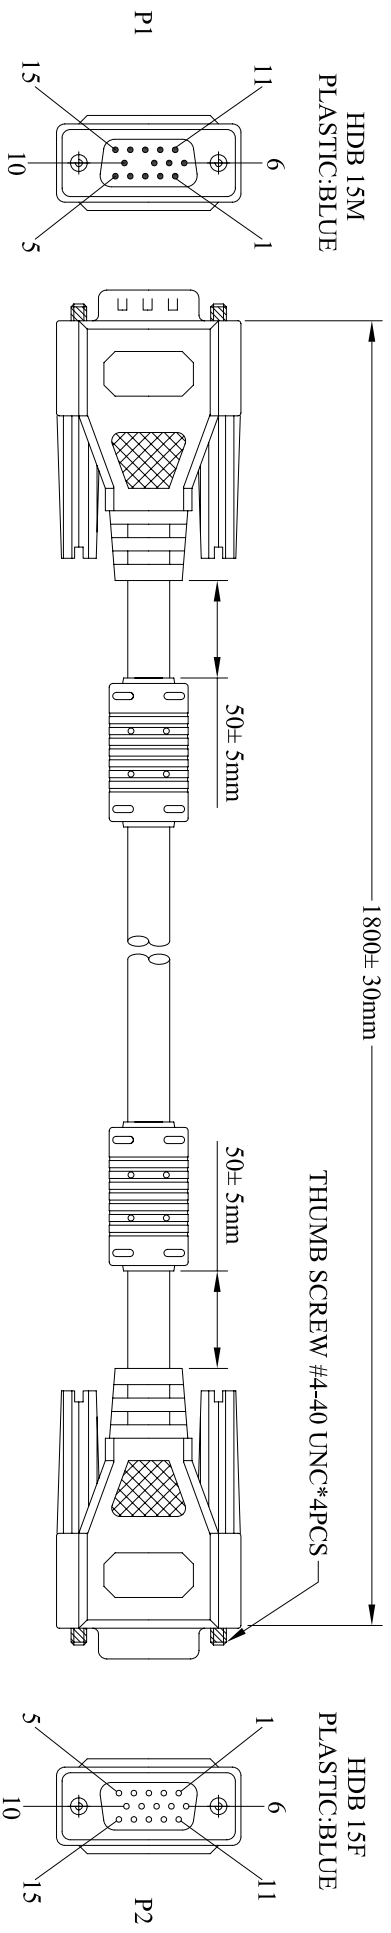

| PIN OUT | |
|-------------|--------------|
| P1 | P2 |
| 1 — ○ — | 1 — ORANGE — |
| 2 — RED — | 2 — WHITE — |
| 3 — ○ — | 3 — YELLOW — |
| 4 — BROWN — | 4 — GREEN — |
| 5 — BLACK — | 5 — RED — |
| | 6 — SHELL — |
| | 7 — BRAID — |
| | 8 — SHELL — |
| | 9 — CENTER — |
| | 10 — SHELL — |

- A HDB 15M PLASTIC:BLUE
 - B
 - C
 - D
 - E
 - F
 - G
 - H
- NOTES:
- 1.CABLE:[30AWG(7/0.102 T.C)*1C INS:FOAM-PE ID:1.3± 0.05 +SPIRAL(T.C)]*3C INS:PVC ID:Ø2.3± 0.1+28AWG(7/0.127 T.C)*7C +INS:SR-PVC ID:Ø0.9± 0.05mm+AL/MY+DRAIN 30AWG(7/0.102 T.C) +BRAID (16/4/0.1 T.C)+OUTER JACKET:PVC COLOR:BLACK. OD:Ø7.5± 0.15mm UL-2919 SUPPLIER:LIAN FENG(GLL)
 - 2.CONNECTOR:
 - P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)
 - P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - 3.FERRITE CORE:17.5*28.5*9.5mm
 - 4.SHEILD:COOPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
 - 5.HOOD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
 - 6.ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 OHMS MAX <3>.INSULATION RESISTANCE 20M OHMS MIN
 - 7.PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP4.

RoHS Compliant

EAN Code: 4016032183631

STR1407

| | | |
|-------------|-------------|-----------|
| Drawn by | Dec.20,2005 | Alex Dan |
| Checked by | Dec.20,2005 | Norman Xu |
| Approved by | | |

ASSMANN
Electronic GmbH

Part No. **AK 3220XF AL**

Title: HDB15/M - HDB15/F CABLE 1.8M

| | | | |
|-------|-----|-------|-----|
| Scale | N/A | Sheet | 1/1 |
| Unit | MM | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| H | G | F | E | D | C | B |