



Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec:20,2005	01

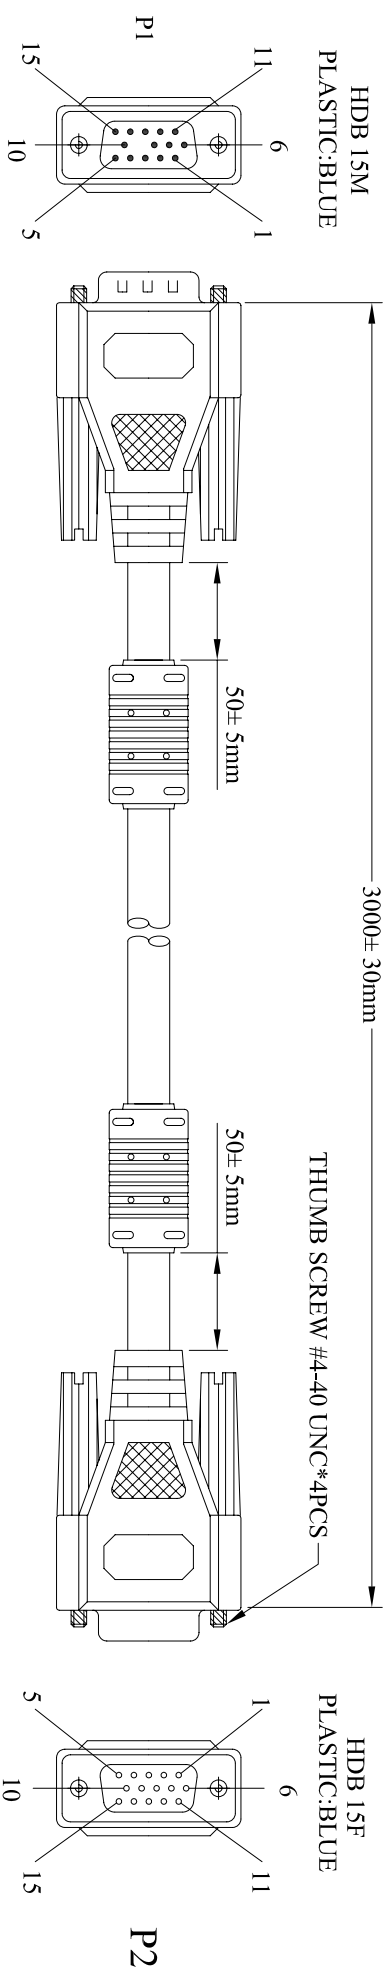

**NOTES:**

- CABLE:[30AWG(7/0.102 T.C)\*1C INS:FOAM-PE ID:1.3±0.05 +SPIRAL(T.C)]\*3C INS:PVC ID:Ø2.3±0.1+28AWG(7/0.127 T.C)\*7C +INS:SR-PVC ID:Ø0.9±0.05mm+AL/MY+DRAIN 30AWG(7/0.102 T.C) +BRAID (1/6/4/0.1 T.C)+OUTER JACKET:PVC COLOR:BLACK. OD:Ø7.5±0.15mm UL-2919 SUPPLIER:LIAN FENG(GLL)
- CONNECTOR:
  - P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)
  - P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
- FERRITE CORE:17.5\*28.5\*9.5mm
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
- ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 OHMS MAX <3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP4.

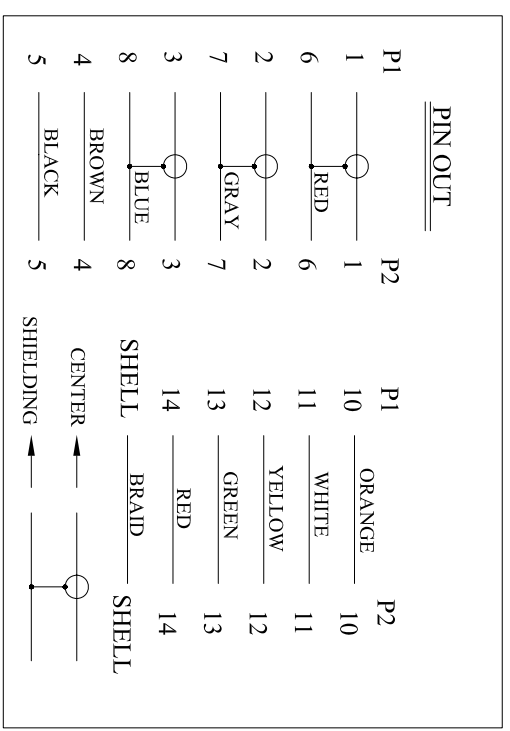

A	1	2	3	4	5	6	7	
B	HDB 15M PLASTIC:BLUE THUMB SCREW #4-40 UNC*4PCS HDB 15F PLASTIC:BLUE							
C	P1 P2							
D	P1 P2 P1 P2 1 10 10 10 2 11 11 11 3 12 12 12 4 13 13 13 5 14 14 14 SHELL BRAID SHELL CENTER SHELL SHIELDING							
E	P1: HDB 15P MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD) P2: HDB 15P FEMALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL 3. FERRITE CORE: 17.5*28.5*9.5mm 4. SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID 5. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK. 6. ELECTRONIC TEST: <1>. 100% OPEN SHORT & MIS WIRE TEST <2>. CONTACT RESISTANCE 3 OHMS MAX <3>. INSULATION RESISTANCE 20M OHMS MIN							
F	7. PACKING: SEE P-0039 REV. C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP4.							
G	Title: AK 3730XF AL Part No.							
H	Title: HDB15/M - HDB15/F CABLE 3.0M Scale: N/A Unit: MM Sheet: 1/1							

Rohs Compliant

EAN Code: 4016032183648

STR1407

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

**ASSMANN**  
Electronic GmbH