Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

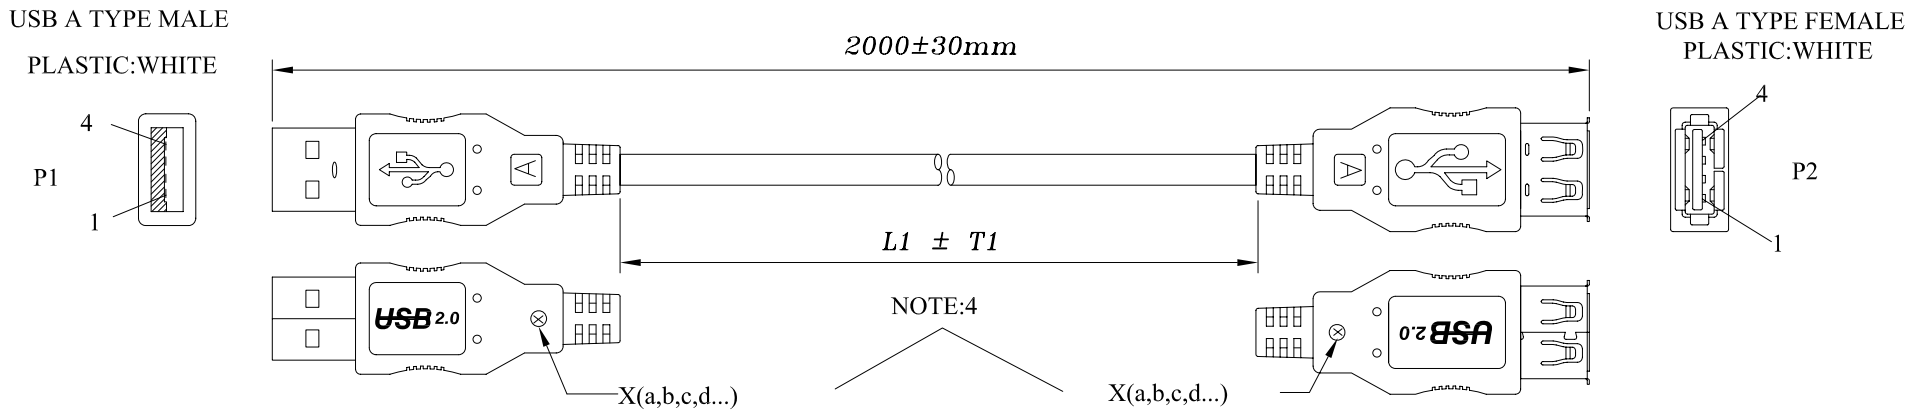

NOTES:

1.CABLE: UL-2725 [28AWG(7/0.127)*1PR+24AWG(7/0.203)*2C
+AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN
PVC JACKET OD:4.7± 0.15mm COLOR:BEIGE,REV 2.0

2.CONNECTER:
P1: USB A TYPE MALE GOLD PLATED 30u" CONTACT,
NICKEL PLATED SHELL REV 2.0.
P2:USB A TYPE FEMALE GOLD PLATED 30u" CONTACT,
NICKEL PLATED SHELL REV 2.0.

3.HOOD: MOLDED TYPE, PVC 45P, COLOR:BEIGE.

4.TOOLING CAVITY INDICATION FOR INSPECTION

5.ELECTRICAL TEST:
<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 20M Ohms MIN.

6.PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP3
(HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN OUT

P1		P2	
RED	1	1	VCC
WHITE	2	2	-DATA
GREEN	3	3	+DATA
BLACK	4	4	GROUND
SHELL	BRAID	SHELL	

	Date	Name
Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

ASSMANN
Electronic GmbH

Part No.

AK 701/2

Title:

USB 2.0 Extension Cable

Scale	N/A	Sheet
Unit	MM	1/1

RoHS Compliant

EAN Code:
4016032130260

ST81407