

1

2

3


4

5

6


7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

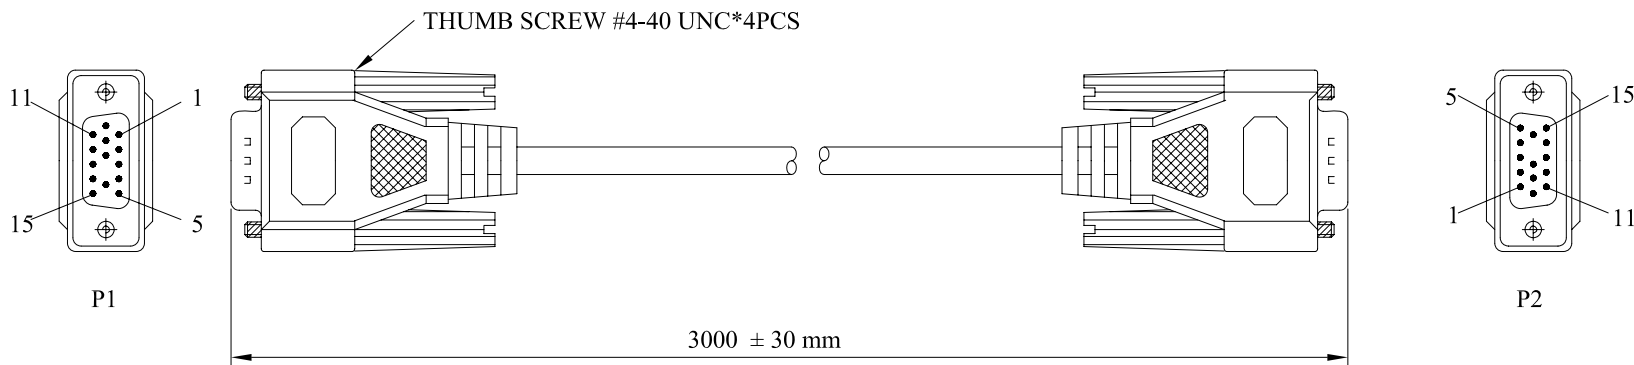

NOTE:

- CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR
PVC JACKET COLOR:BEIGE, OD:6.0±0.2mm
- CONNECTOR:
P1&P2:HD15P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)
- HOOD:MOLDED TYPE PVC 45P COLOR:BEIGE.
- ELECTRICAL TEST:
<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 20M Ohms MIN.
- PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE
PACKING TYPE: DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

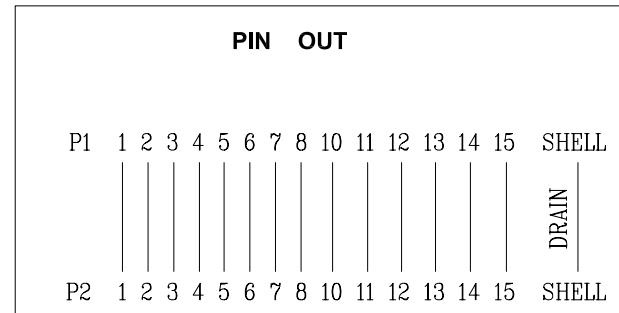

RoHS Compliant

EAN CODE:
4016032063575

ST81407

Drawn by	Dec.20,2005	Norman Xu	Part No. AK 376
Checked by	Dec.20,2005	Alex Dan	
Approved by			
ASSMANN Electronic GmbH			Title VGA Monitor Connection Cable
Scale	N/A		Sheet 1/1
Unit	MM		

1

2

3

4

5

6

7